

# OPTONICA

## USER MANUAL

SKU: 7225



### PARAMETERS


Power: 5W  
Lumens: 320LM  
Battery V/Ah: 3.7V 3600MAH  
Light Color: 6000K  
Beam angle: 180°  
Size of product: 350x110x55mm  
Material: ABS

### INSTALLATION PROCEDURE

1. Remove the screw, open the mask, select the exit hole and connect the input line.
2. Screw the lamp where it has to be installed.
3. Plug in the battery socket connector.
4. Depending on your needs, select a good mode, refer to the third function.
5. Stick the instruction sticker on the light-emitting cover and attach the emitting cover of Light with screws.

### QUESTIONS REQUIRING ATTENTION

1. The tightening of the screws can effectively prevent water and dust from extending the service life.
2. Don't change the bright source! Don't disassemble the machine!
3. In order to improve water and dust tightness, do not drill the exit hole that is not necessary.

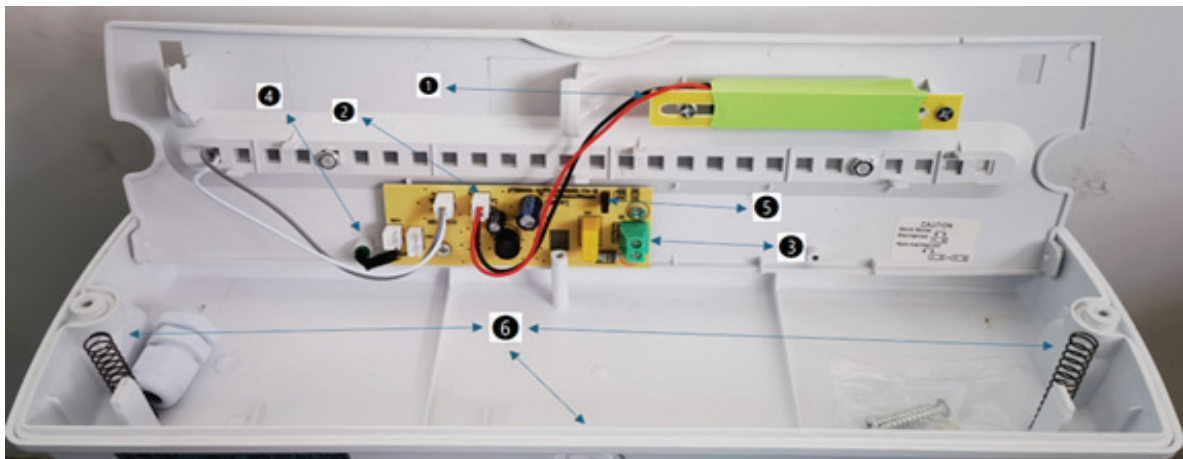

### PRESENTATION ON THE FUCTION

1. Lithium battery, lithium battery 3.7 V 1800mAh, the battery life is 2 years. When the lifespan is insufficient, the same type of battery can be replaced to continue using.
2. The battery socket is disconnected by default when leaving the factory. It must be plugged in during Installation and use.
3. Input line socket, insert the zero line of the 85-265V energized line into the connection terminal .
4. Illuminated light. It lights up green when the device is turned on.
5. The mode consists of selecting the outlet, which is plugged in by default when leaving the factory. In the event of a power and power failure, the lamp lights up. For example, if the terminal is removed, the lamp does not Does not turn on when there is power and it turns on when the power is turned off.
6. Exit holes reserved,in order to better resist water and dust, the Outlet holes that must be used can be drilled.